



4" IC/NON-IC LED FIRE RATED HOUSING NEW CONSTRUCTION RECESSED CAN

SKU: A4/LED/FR

DESCRIPTION

This product is UL fire rated and can be protected for 2 hours with a double wall fixture incorporates a non-combustible fiber insulation to prevent flames, toxic gases, and ignition gases from passing through.

FEATURES

- UL fire ratings up to 2 hours
- For use in insulated ceilings and non-insulated ceilings.
- Airtight (Per ASTM-E283)
- Quick connect provided
- 13-5/8" to 25" Bar hangers with captive nails and alignment foot
- Housing adjusts from 1-1/2" to accommodate various ceiling thickness
- For use only with UL or cUL Classified LED R retrofit kit suitable for 4 inches recessed housing.

PLASTER FRAME

- Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

HOUSING

- Die formed 22 guage galvanized steel construction. Housing interior is comprised of a flexible non-combustible insulation.

JUNCTION BOX





- Listed for through branch circuit wiring.
- Contains one 1-1/8", one 1/2", three 7/8" knockouts and four Romex pryouts with strain relief.

BAR HANGER

- Pre-installed Real nail easily install in regular lumber, engineered lumber.
- Swivel bar hanger which is bendable at 90 degree angle will help to install more easily.
- Bar Hangers are adjustable from 13 - 5/8" to 25" and can be repositioned 90 degree on plaster frame.


LISTINGS

- cULus Listed for Damp Location
- cULus Listed for Wet Location (with specified trims)
- cULus Listed for Feed Through
- Certified under ASTM-E283 for Air tight construction

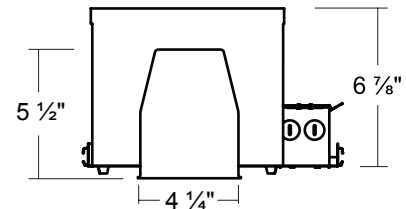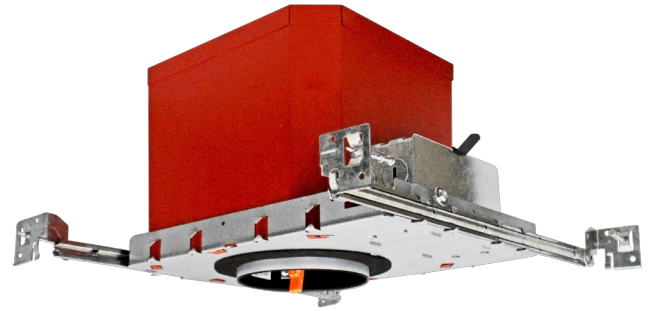


INSTALLATION BY SWIVEL HANGER

Step 1.



Step 2.



Project:	
Contact:	
Location:	
Fixture Type:	

Quantity	Notes