



# LED COMBINATION EMERGENCY & EXIT SIGN GREEN SPECIFICATION SHEET

**SKU: CR-7082GX**

**Features:**

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-resistant
- 3.6V Nickel Cadmium Battery




**Specifications:**

- Input voltage: 120/277V
- Power consumption: 3.5W max
- Output: 4W max
- Charging time: 24 HOURS
- Operating temperature: 0°C~40°C
- Dimension: 19.65" x 7.20" x 1.76" (500x184x108.34mm)
- Color: Green
- Discharge time: 90 minutes



**Listings:**

- Certificate: UL / CUL

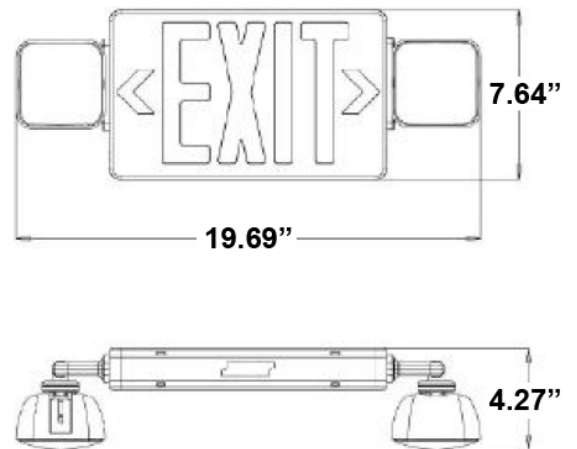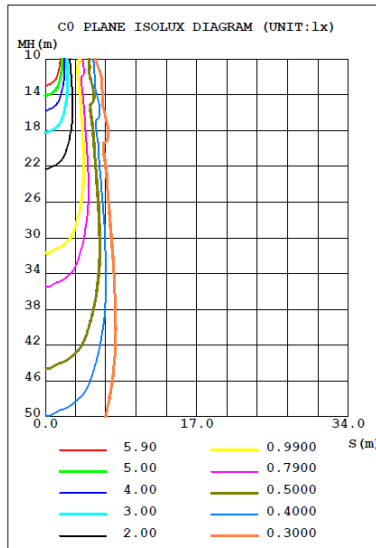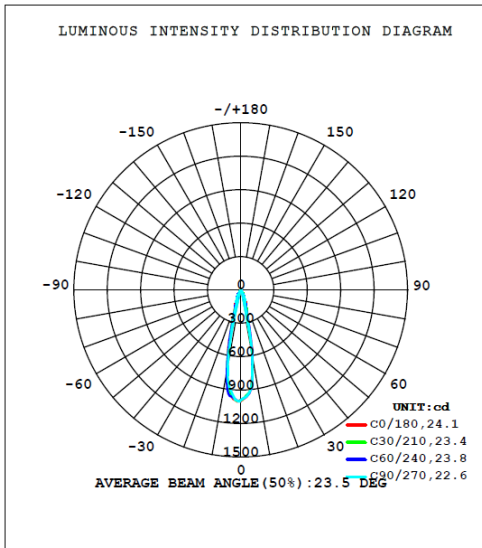

Project:	
Contact:	
Location:	
Fixture Type:	

Quantity	Notes